



**INSTALLATION IN PAVED AREAS**

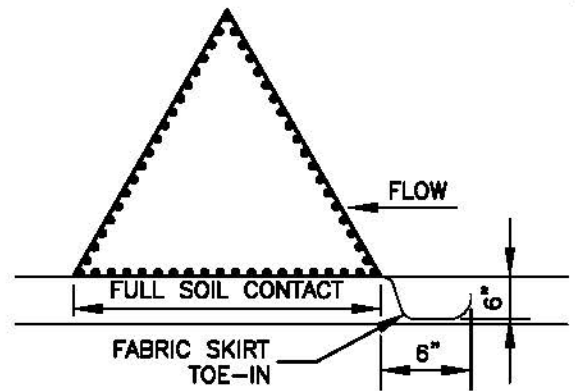

**ALTERNATE EMBEDDING DETAIL (1)**

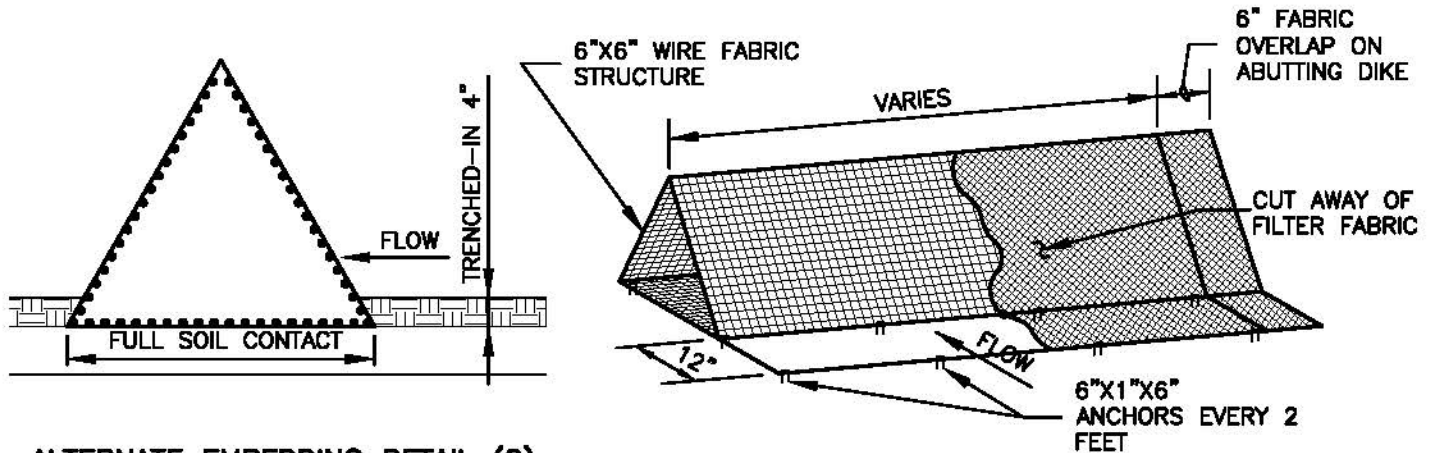

**ALTERNATE EMBEDDING DETAIL (2)**

**NOTES:**

1. DIKES SHALL BE PLACED IN A ROW WITH ENDS TIGHTLY ABUTTING.
2. FABRIC COVER AND SKIRT SHALL BE A CONTINUOUS WRAPPING OF GEOTEXTILE. THE SKIRT SHALL BE A CONTINUOUS EXTENSION OF THE UPSTREAM FACE FABRIC.
3. DIKES AND SKIRT SHALL BE SECURELY ANCHORED IN PLACE WITH WIRE STAPLES AT 2' INTERVALS ON BOTH EDGES AND SKIRT OR WITH 3/8" DIAMETER REBAR WITH TEE ENDS.
4. FILTER MATERIAL SHALL BE LAPPED OVER ENDS 6" TO COVER DIKE-TO-DIKE JOINTS. JOINTS SHALL BE FASTENED WITH GALVANIZED SHOAT RINGS.
5. INSPECTION SHALL BE MADE WEEKLY OR AFTER EACH RAINFALL EVENT AND REPAIR OR REPLACEMENT SHALL BE MADE PROMPTLY AS REQUIRED.
6. ACCUMULATED SILT SHALL BE REMOVED WHEN IT REACHES A DEPTH OF 4" AND DISPOSED OF IN A MANNER WHICH WILL NOT CAUSE ADDITIONAL SILTATION.
7. AFTER THE DEVELOPMENT SITE IS COMPLETELY STABILIZED, THE DIKES AND ANY REMAINING SILT SHALL BE REMOVED. SILT SHALL BE DISPOSED OF AS INDICATED IN NOTE #6 ABOVE.

RECORD SIGNED COPY  
ON FILE AT PUBLIC WORKS

APPROVED

03-25-11

DATE

THE ARCHITECT/ENGINEER ASSUMES  
RESPONSIBILITY FOR THE APPROPRIATE  
USE OF THIS DETAIL. (NOT TO SCALE)

**CITY OF ROUND ROCK**

**TRIANGULAR SEDIMENT  
FILTER DIKE DETAIL**

DRAWING NO:  
EC-11

