


LOCAL RESIDENTIAL

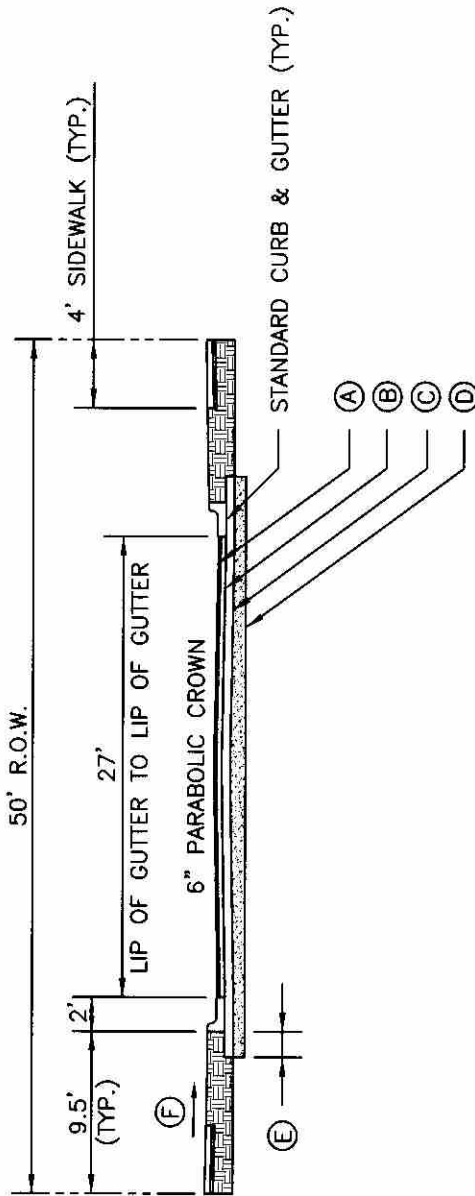

CONSTRUCTION INDEX:

- (A) HOT MIX ASPHALTIC CONCRETE.
- (B) PRIME COAT.
- (C) FLEXIBLE BASE.
- (D) COMPACTED SUBGRADE. (LIME STABILIZED WHEN REQUIRED)
- (E) BASE COURSE TO EXTEND 18 INCHES MINIMUM FOR SOILS WITH PI OF 20 OR LESS, 3 FEET FOR ALL OTHER SOILS.
- (F) 2% TYPICAL UNLESS OTHERWISE INDICATED ON THE GRADING PLAN.
- (G) ALL UNPAVED AREAS WITHIN THE LIMITS OF CONSTRUCTION, SHALL BE SODDED OR SEEDED AS INDICATED.
- (H) FOR MINIMUM PAVEMENT SECTION, SEE GEOTECHNICAL ENGINEER'S RECOMMENDATION, BASED ON THE DACS TRANSPORTATION CRITERIA MANUAL (SECTION 3.2.1.)

RECORD SIGNED COPY  
ON FILE AT PUBLIC WORKS  
APPROVED

02-10-06

DATE

THE ARCHITECT/ENGINEER ASSUMES  
RESPONSIBILITY FOR THE APPROPRIATE  
USE OF THIS DETAIL.

CITY OF ROUND ROCK

LOCAL STREET SECTION

DRAWING NO:  
ST-10A

