



**CITY OF ROUND ROCK, TEXAS  
INVITATION FOR BID  
DELL DIAMOND STADIUM GATE REPAIRS**

**IFB #: 15-005**

**ADDENDUM NO. 1**

**Date: January 27, 2015**

Please note questions, clarifications, revisions and additions to the solicitation referenced above. **Please ensure you sign and return an original with your sealed proposal. Failure to do so, may automatically disqualify your response from consideration for award.**

**1. Additional notes for Area 2 (Part II, Section 4.2): Player's gate.**

Stabilize player's gate with two (2) braces. Braces shall be added (welded, bolted, etc.) to each side post with a header installed over the top of the gate, connecting the braces to each side post.

**2. Additional notes for Area 3 (Part II, Section 4.3): Center field gate.**

The existing slide gate will have no alterations. The swing gate to be installed will have a drop rod installed and swing open in an outward direction.

**3. Additional notes for Area 4 (Part II, Section 4.4): Center field ramp railing.**

Metal eyelets shall be installed (welded, bolted, etc.) on the hand rails between each open space, so that chains can be fastened to close off the open areas as needed. Round Rock Express will supply chains.

**4. Additional notes for Area 5 (Part II, Section 4.5): Install inner cage inside indoor batting cage for storage.**

The swing out gate shall be on the left end of the cage and will be a 4 ½ foot wide gate with the hinges attached to the smaller 1 ½ foot fence portion connected to the wall.

**5. Additional notes for Area 6 (Part II, Section 4.6): East side manual gate.**

The wheel attached to the bottom of the left gate needs to be straightened and/or bearing removed and replaced. Three (3) heavy duty drop down rods and counter sunk concrete piping will need to be installed.

**6. Additional notes for Area 7 (Part II, Section 4.7): Rear delivery gates.**

The gates shall remain the same height as they are currently. The gates will need to be reconstructed in a way to make the gates lighter in weight. New operators will need to be added and have a three (3) to five (5) year warranty held by the installer.

**7. Additional notes for Area 8 (Part II, Section 4.8): Employee gate at back dock.**

The current latch will need to be replaced to allow for chain and pad lock use.


**8. Area 9 Added: Rocking Chair Seating Area hand rails.**

There are 9 single hand rails for the steps to the seating area, which will need to be replaced, or repaired in the same manner as area 1: Staircase cane guards.

**9. Photographs taken to identify each Area (pages 3-9).**

**Area 1:** Staircase cane guards located at the bottom of the Clubhouse stairs and Player's gate stairs.



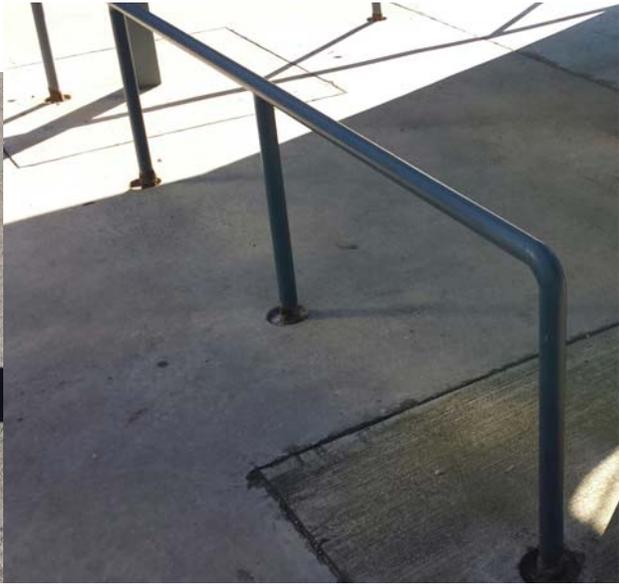


**Area 2:** Player's gate



**Area 3:** Center field gate



**Area 4:** Center field ramp railing

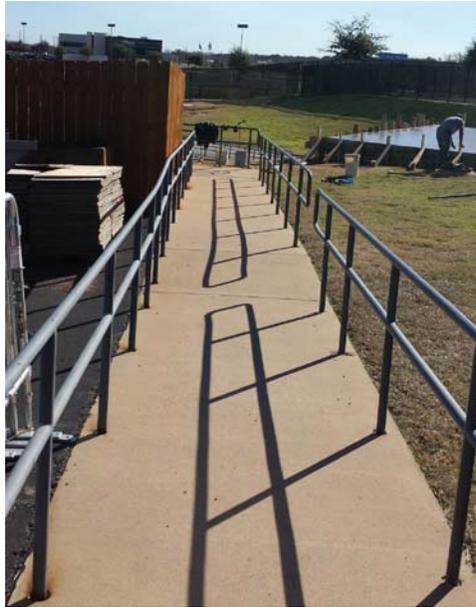

**Area 5:** Install an inner cage inside the indoor batting cage for storage



**Area 6:** East side manual gate






**Area 7:** Rear delivery gates







**Area 8:** Employee gate at back dock

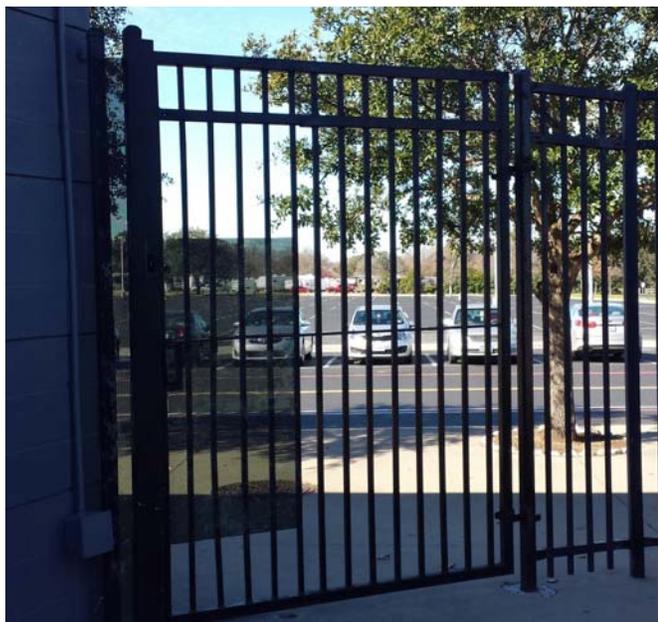

**Area 9: Rocking chair seating area hand rails**

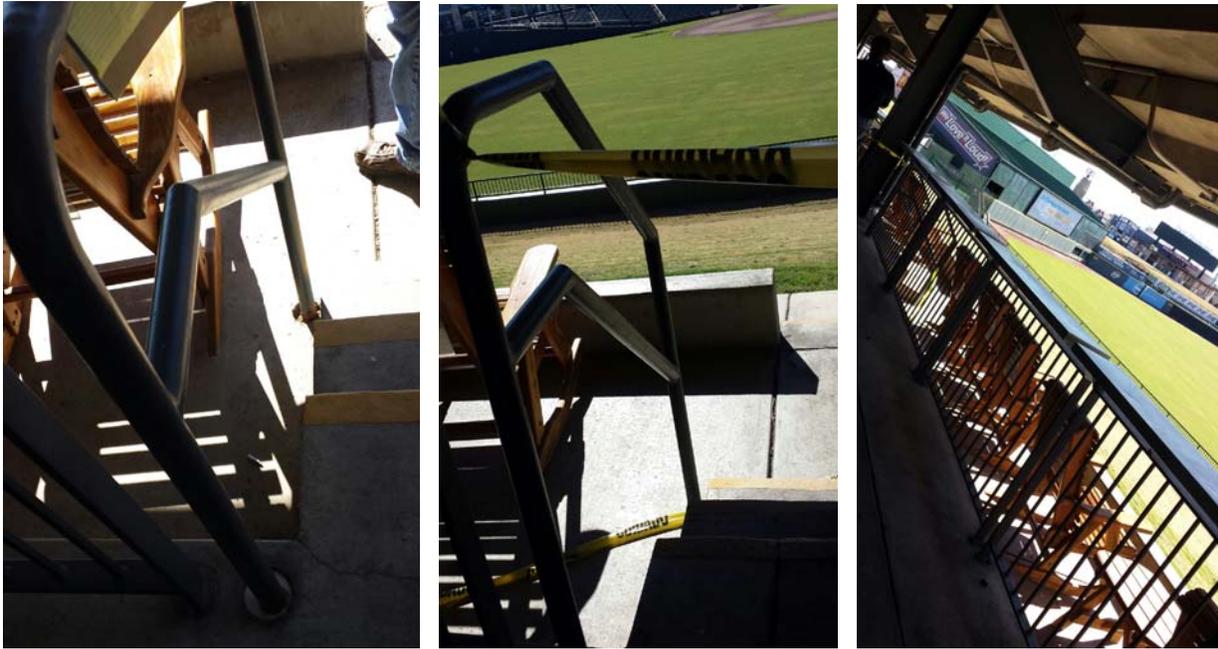

Approved by   
Deborah Knutson, Purchaser

By the signatures affixed below, Addendum No. 1 is hereby incorporated into and made a part of the above referenced solicitation.

ACKNOWLEDGED

\_\_\_\_\_  
Vendor

\_\_\_\_\_  
Authorized Signature

\_\_\_\_\_  
Date

**RETURN ONE COPY SIGNED COPY OF THIS ADDENDUM TO THE PURCHASING OFFICE WITH YOUR SEALED PROPOSAL. FAILURE TO DO SO MAY AUTOMATICALLY DISQUALIFY YOUR RESPONSE FROM CONSIDERATION FOR AWARD.**