


PIPELIFE

Sewer

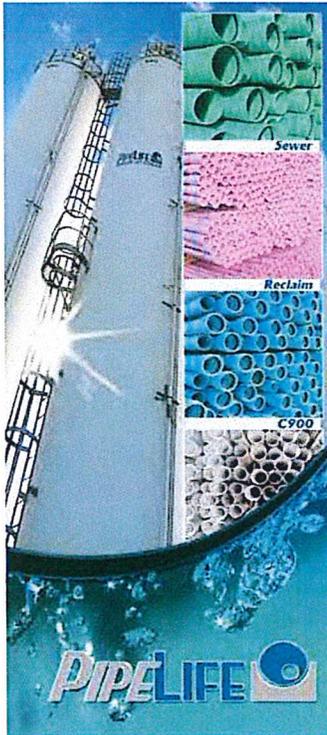

PipeLife Jetstream manufactures sewer pipe from 4" to 18" in both bell end and gasketed products. Our pipes are manufactured under ASTM D-3034 and ASTM D-2729 Standards. PipeLife Jetstream Sewer pipe is available in 14ft and 20ft lengths.

The primary purpose of PipeLife Jetstream IPS is for the conveyance of sewage from the building and for the collection and transmission to treatment source.

PipeLife Jetstream uses compound according to Class 12454-B as prescribed in ASTM-1784. All sewer pipe shall meet the requirements of ASTM D-3034 for sizes 4" - 15" and ASTM F-679 for 18" pipe. Integral gasket joints are manufactured according to ASTM F477 and ASTM D3139. To aid in the installation of PipeLife Jetstream's IPS, each spigot end is beveled and includes a depth mark for insertion guidance.

SDR 35

Nominal Size	O.D	I.D.	Wall Thickness	WT. Per FT.
4	4.215	4.095	.120	.986
6	6.275	6.095	.180	2.27
8	8.400	8.16	.240	4.08
10	10.500	10.200	.300	6.35
12	12.500	12.140	.360	9.11
15	15.300	14.863	.437	13.78

SDR 26

Nominal Size	O.D	I.D.	Wall Thickness	WT. Per FT.
4	4.215	4.053	.162	1.435
6	6.275	6.034	.241	3.157
8	8.400	8.077	.323	5.664
10	10.500	10.096	.404	8.873
12	12.500	12.019	.481	12.612
15	15.300	14.712	.588	18.962

F-679

18	18.701	18.165	0.536	20.78
----	--------	--------	-------	-------