

TOP OF BOX LID TO BE FINISHED WITH FINISHED SURFACE

TOP OF ROUND ROCK STANDARD VALVE BOX RING (C-6) & LID (C7).


1'-0" MAX.

STEM EXTENSION AS REQUIRED. FASTEN TO OPERATING NUT.

6" DUCTILE IRON PIPE CENTERED ON OPERATING NUT.

HORIZONTAL VALVE WRAPPED WITH 8-MIL. POLYETHYLENE FILM.

CITY OF ROUND ROCK STANDARD VALVE CASING. (C-5)

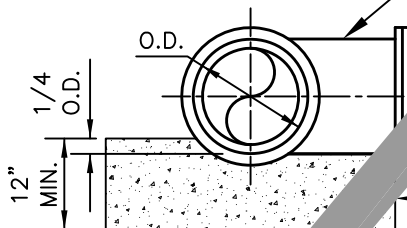

GREASE CAP.

CONCRETE CRADLE. (MIN. 200# CONCRETE) USE ON ALL SIZE 12" VALVES AND OPERATING NUTS.

RECORD SIGNED COPY ON FILE AT PUBLIC WORKS

CITY OF ROUND ROCK

DRAWING NO: WT-12

APPROVED

04-01-10

DATE

THE ARCHITECT/ENGINEER ASSUMES RESPONSIBILITY FOR THE APPROPRIATE USE OF THIS DETAIL. (NOT TO SCALE)

REPLACED
HORIZONTAL VALVE
(DO NOT USE)
INSTALLATION DETAIL

